

# RENOFIX 75

## LIME AND CEMENT CONSTRUCTION MORTAR

**Please follow the technical instructions!**

### AREA OF APPLICATION:

Lime and cement mortar from the mortar group II for building all types of walls (brick, concrete blocks) with higher statistical requirements. This mortar is primarily applicable in renovating works. It saves on time needed for delivery of sand, cement, and lime.

### COMPOSITION:

- Cement
- High-quality rocky lime
- Organic additives <5%

### FEATURES:

- High level of affixation to the base
- High level of utilization
- Well processed with a trowel

### BASE PREPARATION:

Bricks (blocks) need to be dry and clean. Too dry bricks and bricks with a high level of permeability need to be dipped in water before use.

### MORTAR PREPARATION:

Mix one bag of Renofix 75 with a mixer for about 2 minutes with about 7-8 glasses of clean water until the mass becomes homogenous. After this, the material is ready for use. The wall surface must be cleaned from dust and waste. The mortar must be used before it hardens and must not be installed in rain.

### PROCESSING AND PROCESSING CONDITIONS:

The bricks and mortar need to be protected from rain. The mortar is applied by a trowel. The brick is laid onto the mortar and levelled with a level and a construction rope. Any dripping mortar needs to be removed with the trowel. The first layer of bricks must be perfectly horizontal. Any bumps in the lower joint must be levelled. Horizontal joints need to be of a 12 mm +/- 5mm height. Vertical joints need to be of a 10-15 mm width. Must be protected against freezing and quick hardening. In case of longer breaks in working with the mixer, the latter needs to be completely emptied and washed. **It must not be used at temperatures lower than +5°C.** It is not to be mixed with other materials.



### WARNING:

Contains cement and lime. Irritates the skin and the eyes. In case of skin or eye contact, rinse with clean water.

### DELIVERY:

Delivered in 40 kg. paper bags protected against moisture.



### STORAGE:


To be stored in dry space, on top of wooden pallets. Storage time – 3 months.


Technical data	
Product no.:	5319990620200
Product code:	1075
Bags on a pallet:	30

# RENOFIX 75

<b>Granulation:</b>	0-3 mm
<b>Amount of water required:</b>	10 l. / bag
<b>Note:</b>	Consumption figures are approximate and depend to a large extent on the base and installation method
<b>Material density, if dry (EN 1015-10):</b>	ca. 1700 kg/m <sup>3</sup>
<b>Material hardness for 28 days (EN 1015-11):</b>	ca. 6,0 N/mm <sup>2</sup>
<b>MG (EN 998-2):</b>	M5

## General instructions:

All data about the material cease to be valid following the issuance of the above list. These are the data resulting from our current analyses. No legal obligation may arise from these data. The RENOVA products, as well as all raw materials contained in them are subject to constant, continuous tests to ensure constant and same level quality. Our technical advisers are at your disposal for any inquiries regarding the application, processing, and presentation of our products. You may find our current data at [www.renova.com.mk](http://www.renova.com.mk), as a  document or ask for them in the retail shops.

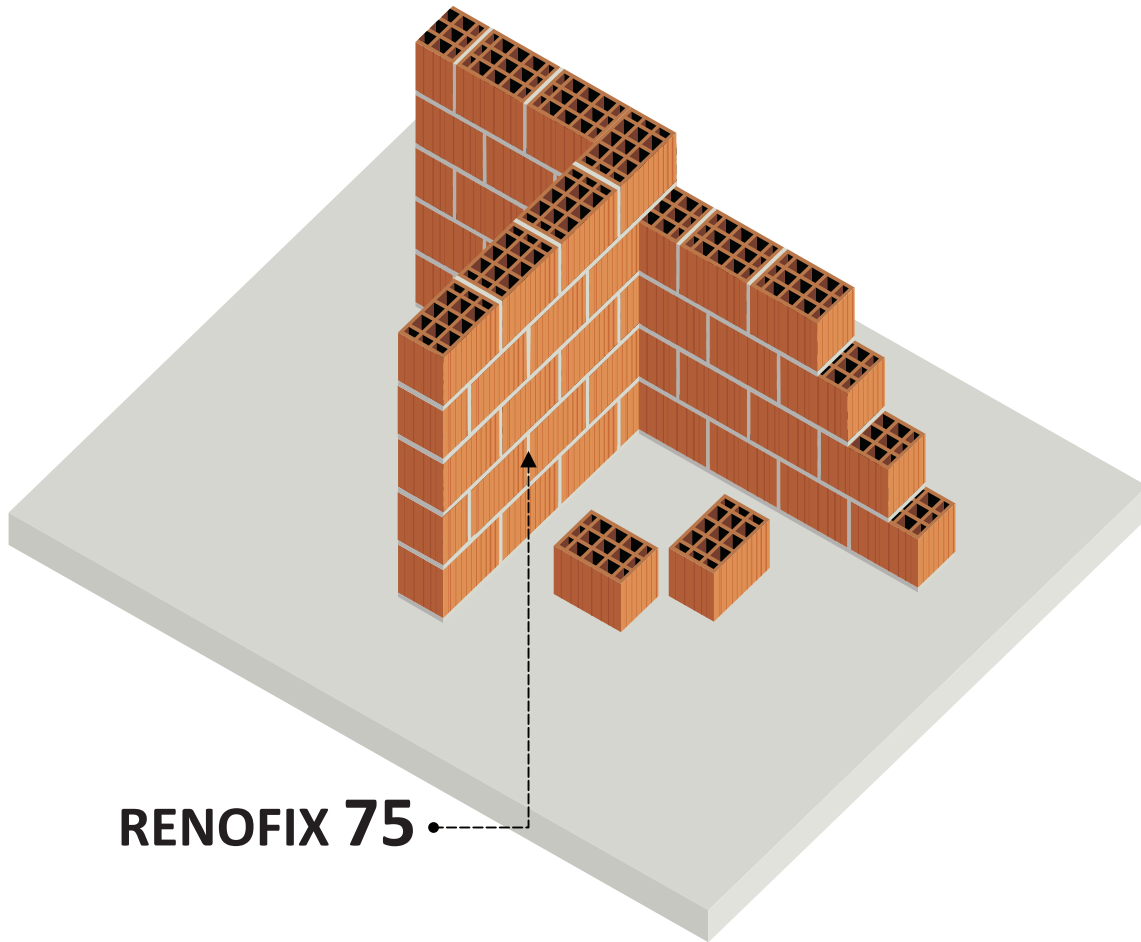

RENOVA PUTZ | [www.renova.com.mk](http://www.renova.com.mk)

RENOVA Dzepeiste, Tetovo, Makedonija | Tel.: 044 487 300 | Fax: 044 487 200 | [info@renova.com.mk](mailto:info@renova.com.mk)  
RENOVA Gureza, Urosevac, Kosovo | Tel.: 00381 290 323 311 | Fax: 00381 290 396 396 | [renova\\_ferizaj@hotmail.com](mailto:renova_ferizaj@hotmail.com)  
RENOVA Vore, Tirana, Albanija | Tel.: 00355 48 301 909 | Fax: 00355 48 301 908 | [renova.tirana@hotmail.com](mailto:renova.tirana@hotmail.com)