

# RENOFUGA

MASS FOR TILE JOINTS ON WALL AND FLOOR AREAS

**Please follow the technical instructions!**

## AREA OF APPLICATION:

Used for interior and exterior filling of joints in ceramic tiles, marble, granite, artificial stone, mosaics.

## COMPOSITION:

- Cement and other fillings.
- Processing improvement additives

## FEATURES:

- Good level of joints filling
- High level of hardness
- Ice-resistance
- Water-resistant after 1 day
- Great selection of colours

## BASE PREPARATION:

The base must be dry, cleaned of dust, waste and oils (sheath oils).

## MORTAR PREPARATION:

Pour one bag of the material into 5 litres of clean water and mix it with a mixer until the mass is homogenous and lump-free.

## PROCESSING AND PROCESSING CONDITIONS:

The material is applied in the joints with a felting parget until the joints are filled-in. When the material is dried, they are smoothed with a felting parget. **It must not be used at temperatures lower than +5°C.** It is not to be mixed with other materials.



## WARNING:

Contains cement. Irritates skin and eyes. In case of skin contact, rinse with clean water and in case of contact with the eyes, seek medical assistance.

## DELIVERY:

Delivered in 20 kg. paper bags protected against moisture.




## STORAGE:





To be stored in dry space, on top of wooden pallets. Storage time – 3 months.

Technical data :	
Product no.:	5319990620286
Product code:	1000 RF
Bags on a pallet:	42
Unit quantity:	20 kg/EH
Granulation:	0-6 mm
Amount of water required:	5 l./bag
Consumption:	0.5-0.8 kg/m <sup>2</sup> for 3 mm joints and 1,01-1,8 kg/m <sup>2</sup> for 5 mm joints

# RENOFUGA

<b>Note:</b>	Consumption figures are approximate and depend to a large extent on the base and installation method
<b>Period for applying:</b>	Within 1 hour on a temperature of 20 degrees
<b>Period of using:</b>	After about 2 hours, depending on the temperature
<b>Material density, if dry (EN 1015-10):</b>	ca 1200 kg/m <sup>3</sup>
<b>Hardness under pressure for 28 days (EN 1015-11):</b>	ca 20 N/mm <sup>2</sup>

**General instructions:** All data about the material cease to be valid following the issuance of the above list. These are the data resulting from our current analyses. No legal obligation may arise from these data. The RENOVA products, as well as all raw materials contained in them are subject to constant, continuous tests to ensure constant and same level quality. Our technical advisers are at your disposal for any inquiries regarding the application, processing, and presentation of our products. You may find our current data at [www.renova.com.mk](http://www.renova.com.mk), as a  document or ask for them in the retail shops.

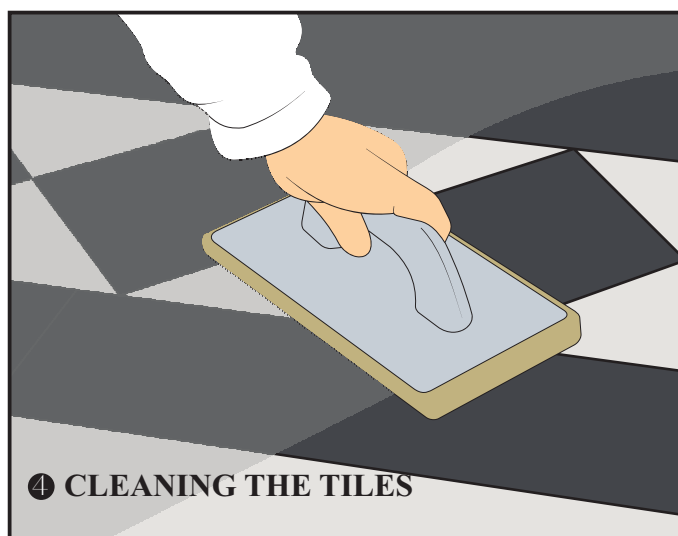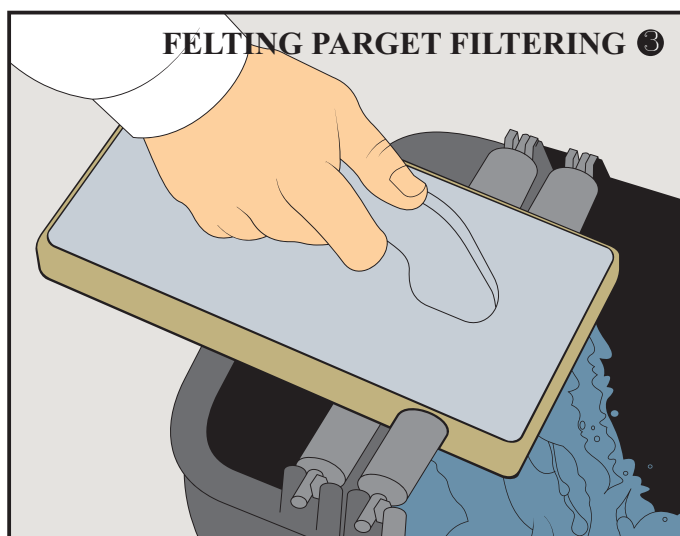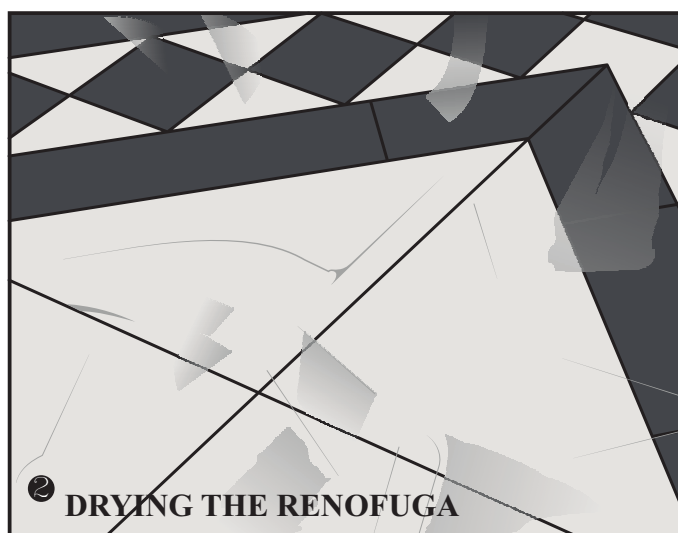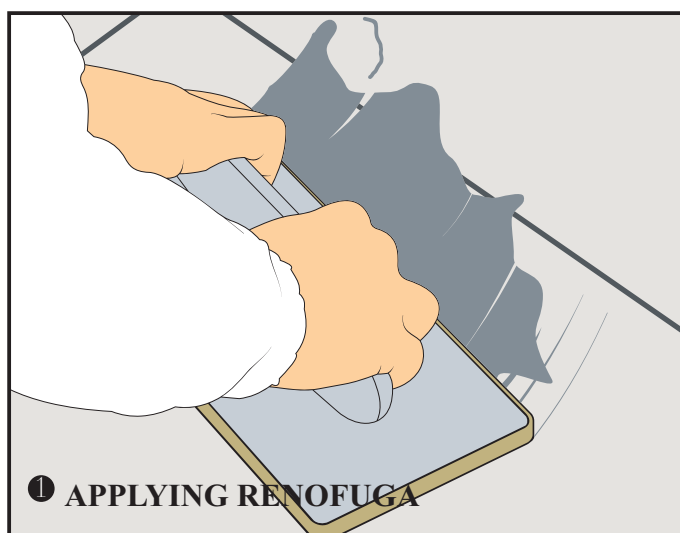

RENOVA PUTZ | [www.renova.com.mk](http://www.renova.com.mk)

RENOVA Dzepeiste, Tetovo, Makedonija | Tel.: 044 487 300 | Fax: 044 487 200 | [info@renova.com.mk](mailto:info@renova.com.mk)  
RENOVA Gureza, Urosevac, Kosovo | Tel.: 00381 290 323 311 | Fax: 00381 290 396 396 | [renova\\_ferizaj@hotmail.com](mailto:renova_ferizaj@hotmail.com)  
RENOVA Vore, Tirana, Albanija | Tel.: 00355 48 301 909 | Fax: 00355 48 301 908 | [renova.tirana@hotmail.com](mailto:renova.tirana@hotmail.com)